

AR-327 (H) Illuminated Touch-Panel & Metal LCD Access Controller



Ingress Protection : IP56

Indicators: 6 LED and 1 beeper

Weatherproof design, can be used in any environment


Metal Housing, have the fashion and the safety design

Illuminated Touch-Panel design for easy operation at any dark site


Patented Relay design can avoid the door opened by any vibration or mis-trigger




Dimensions (mm)

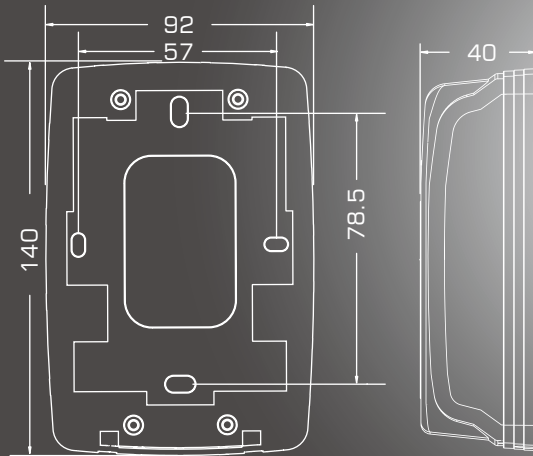

Networking Center Control



Networking / Time attendance



Application

Lift Control



Access Control



Specification

Frequency	125KHz	13.56MHz
Standard	EM Standard	ISO14443A Option ISO15693 DESFire PSAM NFC
Reading Range (Depends on Tags)	3-7cm	1-3cm
Power Supply	10-24VDC	
Power consumption	<3W	
Communication Interface	RS-485	
Baud Rate	9600 bps(N,8,1)	
Temperature	-10°C to +60 °C	
Digital Input	Egress(R.T.E.) / Door contact / Arming Switch	
Relay Output	Alarm Relay / Lock Relay	
Lock Relay Time	ON/OFF, 0.1-600 Sec.	
Alarm Time	Toggle, 1-600 Sec.	
Tamper Switch	Limit Switch (Form C)	
User Capacity	M4/M8	3,000
	M6	65,000
Event log	M4/M8	1,500
External Reader	1 Wiegand Port	
Anti-pass-back	Yes (M4/M8 Only)	
Lift Control	32 Floors, 3,000 Users	
Serial port	Yes	
LCD Panel	128*64(4 Lines messages, 16 Characters each line)	
Transistor Output	Arming LED (or Security trigger signal) / Duress	
Ingress Protection	IP56	
Indicator	4 LED & 2 Bi-Color LED & 1 Beeper	
Keypad Material	Illuminated Touch-panel	
Housing Material	Zinc Alloy	
Time Zone	11/63(Connect to Multi-Door Networking Controller)	
Operation Mode	Standalone/ Networking	
Color	Chrome	
Dimensions (mm)	140(L)X92(W)X40(H)	
Weight (g)	430±10	

Structure

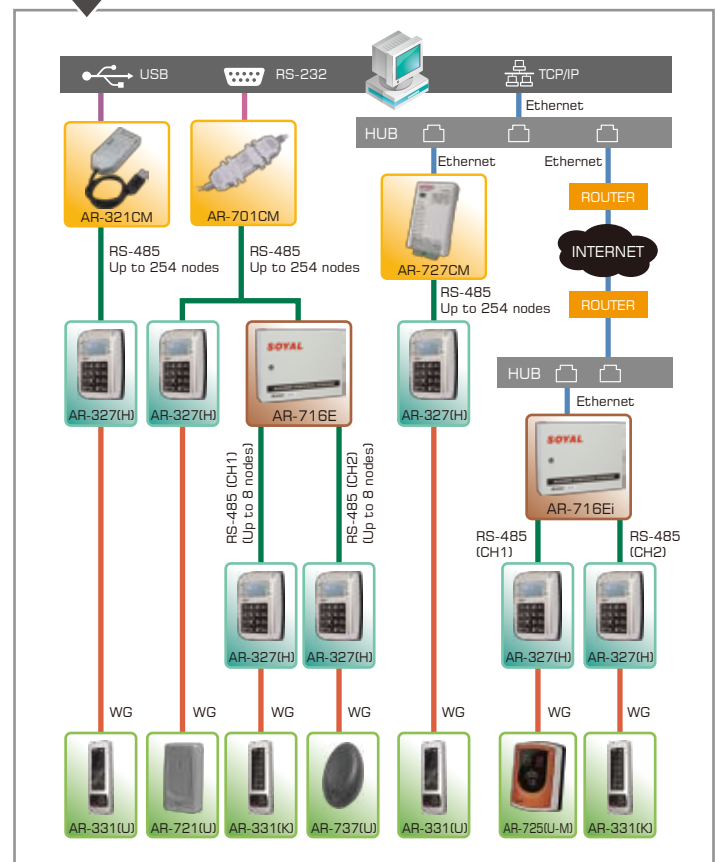


Diagram of single door control

