

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

## IP Camera NEO-002 使用說明 (Window 版)




事前工作(每部電腦只需做一次)：

1. 開啟 Microsoft Internet Explorer (簡稱 IE)
2. 選取『工具』→『網際網路選項』



3. 選取『安全性』→『信任的網站』

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

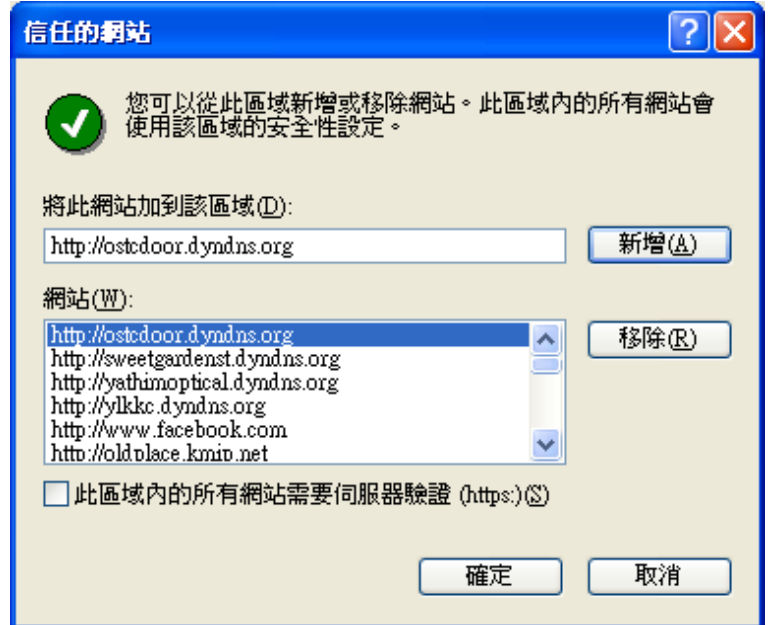

4. 在將此網站加到該區域：加入閉路電視網址。  
e.g <http://ostcdoor.dyndns.org:90> 後按新增，再按確定。  
註：請剔除  此區域內的所有網站需要伺服器驗證(https:)


九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

5. 在『安全性』→『自訂層級』



6. 出現以下畫面，按下面表格設定。

Active X 控制項與插件	
二進位和指令碼行為	啟用
下載未簽署的 Active X 控制項	啟用
下載簽署的 Active X 控制項	啟用
自動提示 Active X 控制項	啟用
起始不標示為安全的 Active X 控制項	啟用
執行 Active X 控制項與插件	啟用
標示為安全的 Active X 控制項	啟用

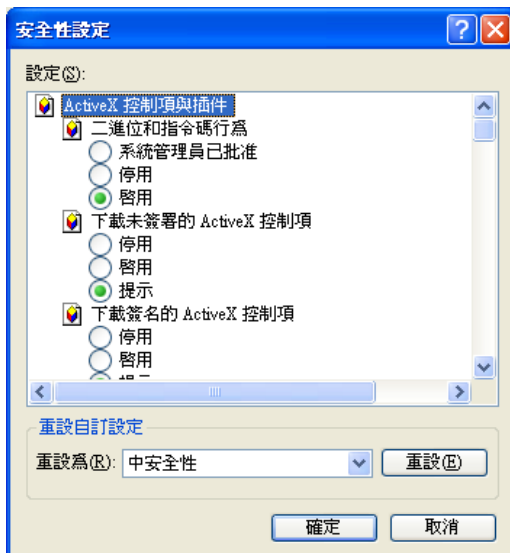

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室


輸入閉路電視網址，正常會出現以下畫面，再輸入密碼就可進入：



使用者名稱：demo

密碼：demo



如出現以下畫面，按以下步驟處理：

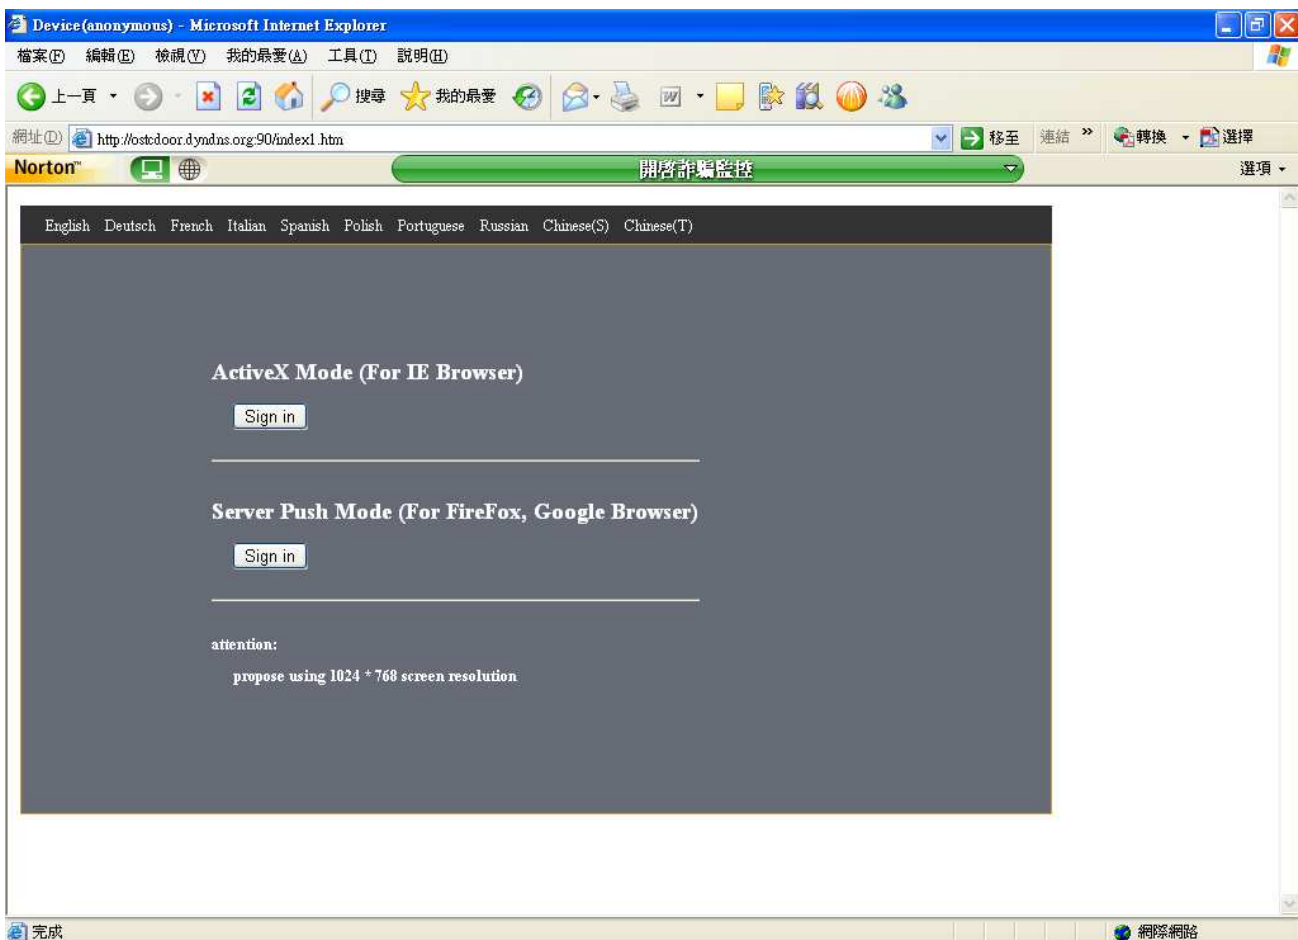

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室




等一會後，畫面出現『為了協助保護你的資訊安全性，Internet Explorer 已封鎖這個網站安裝 Active X 控制項到您的電腦，其他選項請按這裡』句子，按右鍵選取『安裝 Active 控制項』

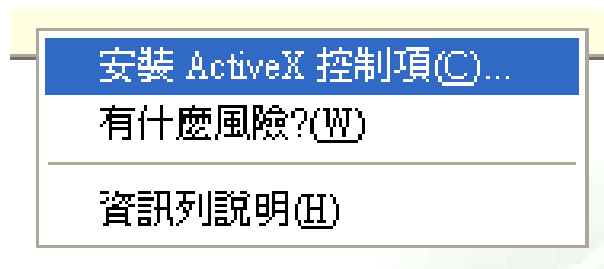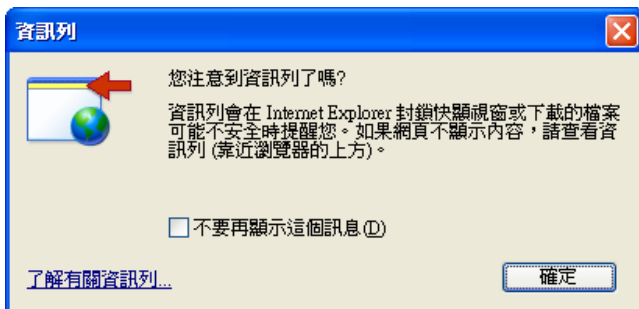


九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室


如出現以下畫面，代表設定未辦妥

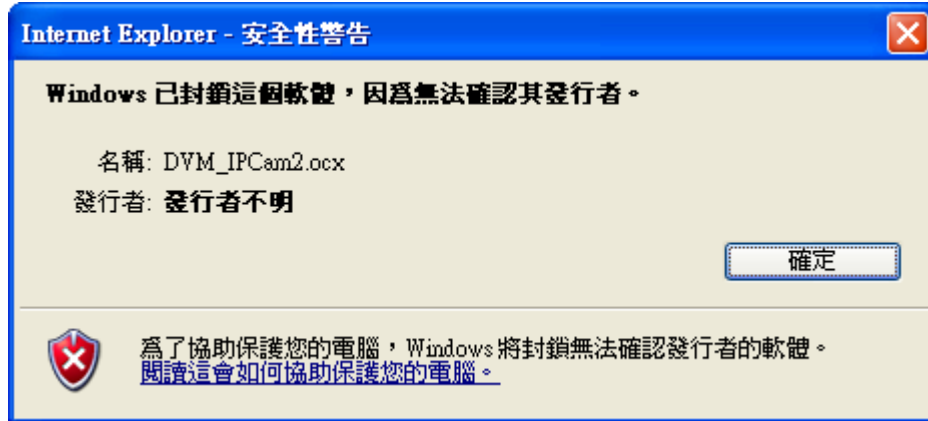

出現以下畫面，再按『安裝』(如有的話)

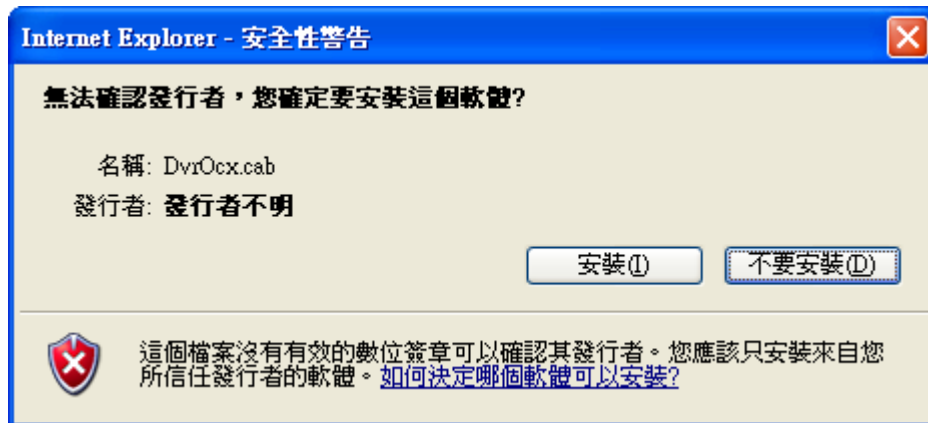

就會出現以下畫面

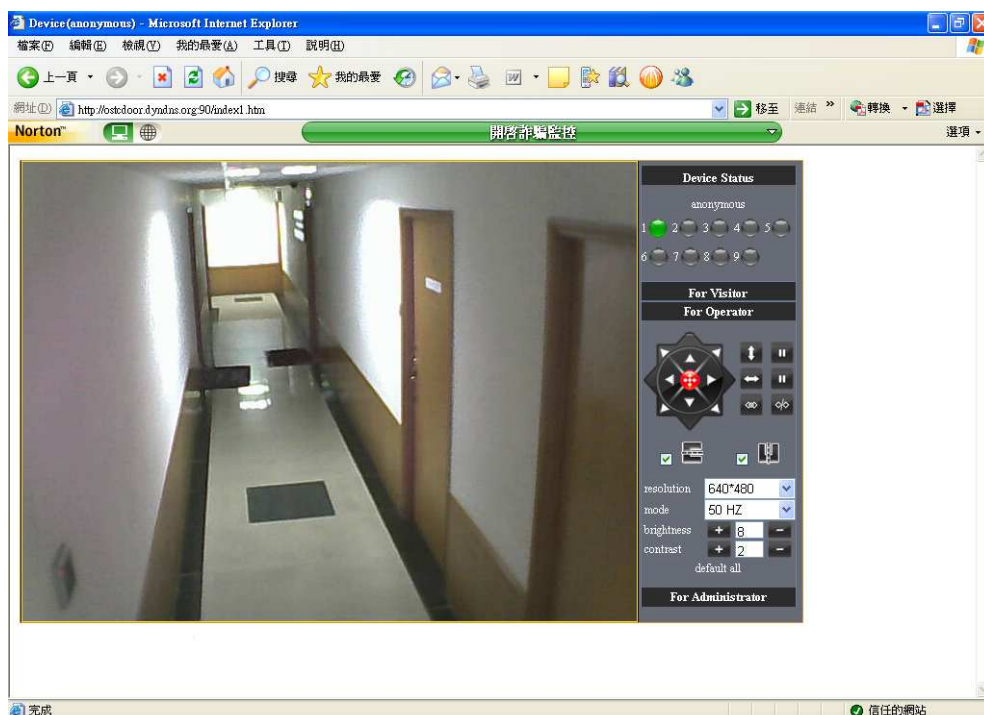


九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

**Device Status**  
anonymous

1 2 3 4 5   
6 7 8 9

**For Visitor**  
**For Operator**



resolution    
mode    
brightness    
contrast

default all

**For Administrator**

**設備狀態**  
佚名

1 2 3 4 5   
6 7 8 9

**參觀者操作**  
**操作者操作**



分辨率    
模式    
亮度    
對比度

恢復缺省值

**管理者操作**

**Device Status**  
anonymous

1 2 3 4 5   
6 7 8 9

**For Visitor**

add timestamp on record

OSD

audio buffer

1 2 3   
4 5 6   
7 8 9

**For Operator**  
**For Administrator**

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

Device Info	設備信息
Alias Settings	設備名稱設置
Date & Time Settings	設備時鐘設置
Users Settings	設備用戶設置
Multi-Device Settings	多路設備設置
Basic Network Settings	基本網絡設置
Wireless Lan Settings	無線局域網設置
UPnP Settings	UPnP 設置
DDNS Service Settings	動態域名設置
Mail Service Settings	郵件服務設置
Ftp Service Settings	Ftp 服務設置
Alarm Service Settings	報警服務設置
PTZ Settings	PTZ 設置
Upgrade Device Firmware	設備固件昇級
Backup & Restore Settings	備份和恢復參數
Restore Factory Settings	恢復出廠設置
Reboot Device	重啟設備
Log	日誌
Back	返回

## Device Info 設備信息

Device Status	
Device ID	00606E60F567
Device Firmware Version	0.22.2.18
Device Embedded Web UI Version	0.3.2.8
Alias	anonymous
Alarm Status	None
DDNS Status	No Action
UPnP Status	No Action
P2P Status	No Action
<input type="button" value="Refresh"/>	

## Alias Settings 設備名稱設置

Alias Settings	
Alias	<input type="text" value="anonymous"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	



九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

Date&Time Settings 設備時鐘設置

Date&Time Settings	
Device Clock Time	Tuesday, 21 December, 2010 21:05:26
Device Clock Timezone	(GMT +08:00) Beijing, Singapore, Taipei ▾
Sync with NTP Server	<input checked="" type="checkbox"/>
Ntp Server	time.nist.gov ▾
Sync with PC Time	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Users Settings 設備用戶設置

Users Settings		
User	Password	Group
admin	●●●●●●	Administrator ▾
guest	●●●●●	Visitor ▾
demo	●●●●	Operator ▾
		Visitor ▾
		Visitor ▾
		Visitor ▾
		Visitor ▾
		Visitor ▾
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>		

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

Multi-Device Settings 多路設備設置

Multi-Device Settings	
Device List in Lan	<div style="border: 1px solid black; height: 60px; width: 100%;"></div> <div style="text-align: center; margin-top: 5px;"> <input type="button" value="Refresh"/> </div>
The 1st Device	This Device
<a href="#">The 2nd Device</a>	None
<a href="#">The 3rd Device</a>	None
<a href="#">The 4th Device</a>	None
<a href="#">The 5th Device</a>	None
<a href="#">The 6th Device</a>	None
<a href="#">The 7th Device</a>	None
<a href="#">The 8th Device</a>	None
<a href="#">The 9th Device</a>	None
attention: If you want to access the device from internet, be sure the host and port that you set can be accessed from internet.	
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Basic Network Settings 基本網絡設置

Basic Network Settings	
Obtain IP from DHCP Server	<input type="checkbox"/>
IP Addr	<input type="text" value="192.168.1.150"/>
Subnet Mask	<input type="text" value="255.255.255.0"/>
Gateway	<input type="text" value="192.168.1.1"/>
DNS Server	<input type="text" value="192.168.1.1"/>
Http Port	<input type="text" value="90"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

Wireless Lan Settings 無線局域網設置

Wireless Lan Settings	
Wireless Network List	<div style="border: 1px solid black; height: 50px;"></div> <input type="button" value="Scan"/>
Using Wireless Lan	<input checked="" type="checkbox"/>
SSID	<input type="text"/>
Network Type	Infra <input type="button" value="v"/>
Encryption	WEP <input type="button" value="v"/>
Authetication	Share Key <input type="button" value="v"/>
Key Format	ASCII Character <input type="button" value="v"/>
Default TX Key	1 <input type="button" value="v"/>
Key 1	<input type="text"/> 64 bits <input type="button" value="v"/>
Key 2	<input type="text"/> 64 bits <input type="button" value="v"/>
Key 3	<input type="text"/> 64 bits <input type="button" value="v"/>
Key 4	<input type="text"/> 64 bits <input type="button" value="v"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

UPnP Settings UPnP 設置

UPnP Settings	
Using UPnP to Map Port	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

DDNS Service Settings 動態域名設置

DDNS Service Settings	
DDNS Service	None <input type="button" value="v"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

## Mail Service Settings 郵件服務設置

Mail Service Settings	
Sender	<input type="text"/>
Receiver 1	<input type="text"/>
Receiver 2	<input type="text"/>
Receiver 3	<input type="text"/>
Receiver 4	<input type="text"/>
SMTP Server	<input type="text"/>
SMTP Port	25
Need Authentication	<input type="checkbox"/>
	<input type="button" value="Test"/> Please set at first, and then test.
Report Internet IP by Mail	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

## Ftp Service Settings Ftp 服務設置

Ftp Service Settings	
FTP Server	<input type="text"/>
FTP Port	21
FTP User	<input type="text"/>
FTP Password	<input type="text"/>
FTP Upload Folder	<input type="text"/>
FTP Mode	PORT <input type="button" value="v"/>
	<input type="button" value="Test"/> Please set at first, and then test.
Upload Image Now	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

## Alarm Service Settings 報警服務設置

Alarm Service Settings	
Motion Detect Armed	<input type="checkbox"/>
Alarm Input Armed	<input type="checkbox"/>
path	C:\Documents and Setting <input type="button" value="path"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

九龍紅磡鶴園街 13 號康力投資大廈 3 樓 317 室

PTZ Settings PTZ 設置

PTZ Settings	
Go center on boot	<input type="checkbox"/>
PT speed	0 ▾
Upward patrol speed	5 ▾
Downward patrol speed	5 ▾
Leftward patrol speed	5 ▾
Rightward patrol speed	5 ▾
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Upgrade Device Firmware 設備固件昇級

Upgrade Device Firmware	
Upgrade Device Firmware	<input type="text"/> <input type="button" value="瀏覽..."/> <input type="button" value="Submit"/>
Upgrade Device Embedded Web UI	<input type="text"/> <input type="button" value="瀏覽..."/> <input type="button" value="Submit"/>

Backup & Restore Settings 備份和恢復參數

Backup & Restore Settings	
Backup	<input type="button" value="Submit"/>
Restore	<input type="text"/> <input type="button" value="瀏覽..."/> <input type="button" value="Submit"/>

Restore Factory Settings 恢復出廠設置



Reboot Device 重啟設備



Log 日誌